



Nativ ("Track")



Short Nativ ("Track")




Nativ with outrigger



Welded steel mesh within frames of flat steel strips fixed to support posts with clamps and screws. This fence is suitable for use as outrigger fencing for institutions, factories, parks, and general demarcation of site boundaries.



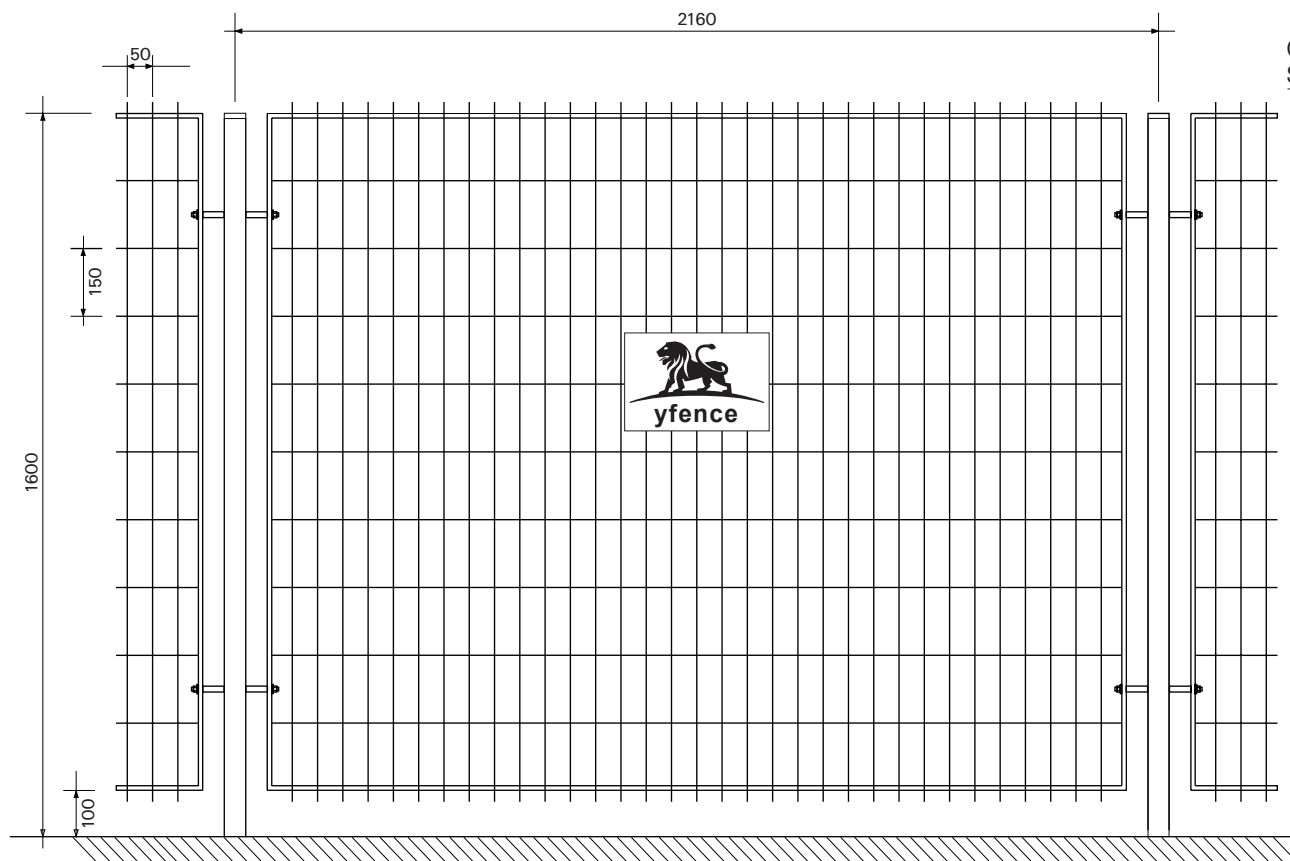



Base: See page outlining installations/anchoring for fence posts.

height	Frame (flat steel bar)	Mesh	*Post	Posts' centres
1100	50 x 4.0 mm	150/50/4.5	60/60/2.0	2160
1600	60 x 5.0 mm	150/50/5.0	60/60/2.0	2160
2000	60 x 5.0 mm	150/50/5.0	60/60/2.0	2160
*2500	60 x 5.0 mm	150/50/5.0	60/60/2.0	2160

The above dimensions are in mm

* In the Nativ model with slanted extended upright the vertical height from the ground is 2350 mm

Zigzag mesh
Hetz ("Arrow") pattern

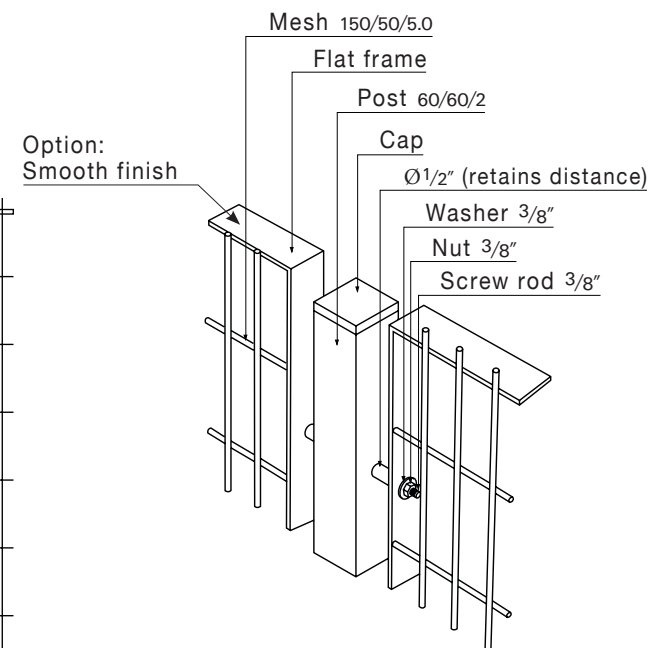

Nativ model with outrigger

